

The MATLAB logo is a stylized 'M' composed of five overlapping triangles. The top-left triangle is orange, the top-right is teal, the middle-left is blue, the middle-right is light blue, and the bottom is a darker blue. The background of the entire image is a close-up, shallow depth-of-field shot of several hands being clasped together, with a person's wrist and a gold bracelet visible in the lower right.

MATLAB EXPO 2018

KOREA

MATLAB EXPO 2018


What's Behind 5G Wireless Communications?

서기환 과장




Agenda

- » 5G goals and requirements
- » Modeling and simulating key 5G technologies
 - Release 15: Enhanced Mobile Broadband
 - IoT and V2X
- » 5G development workflow

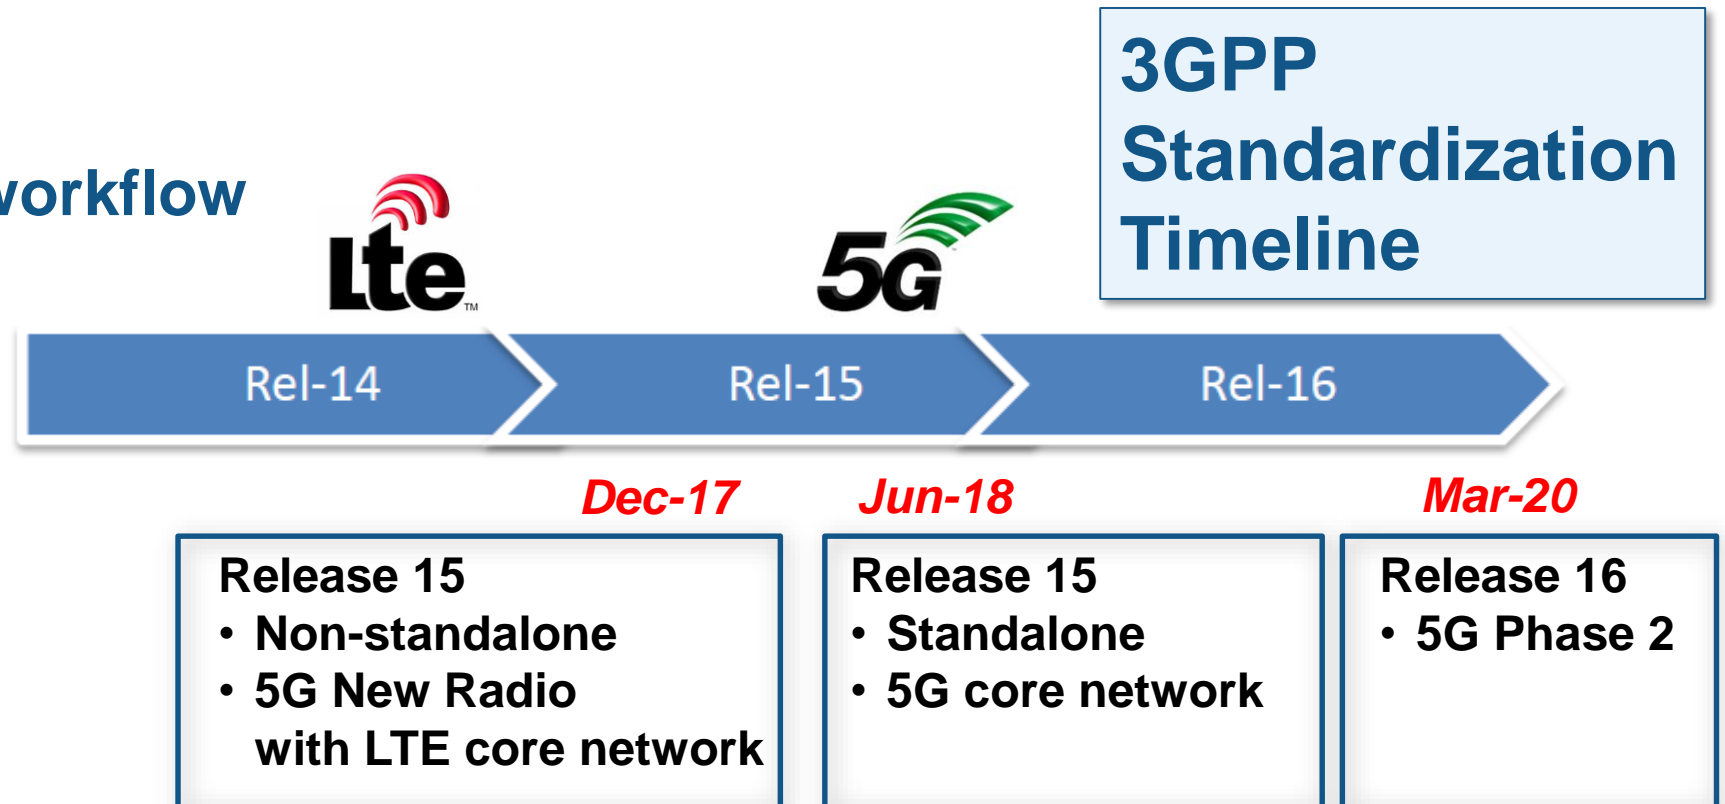

5G Applications and Requirements

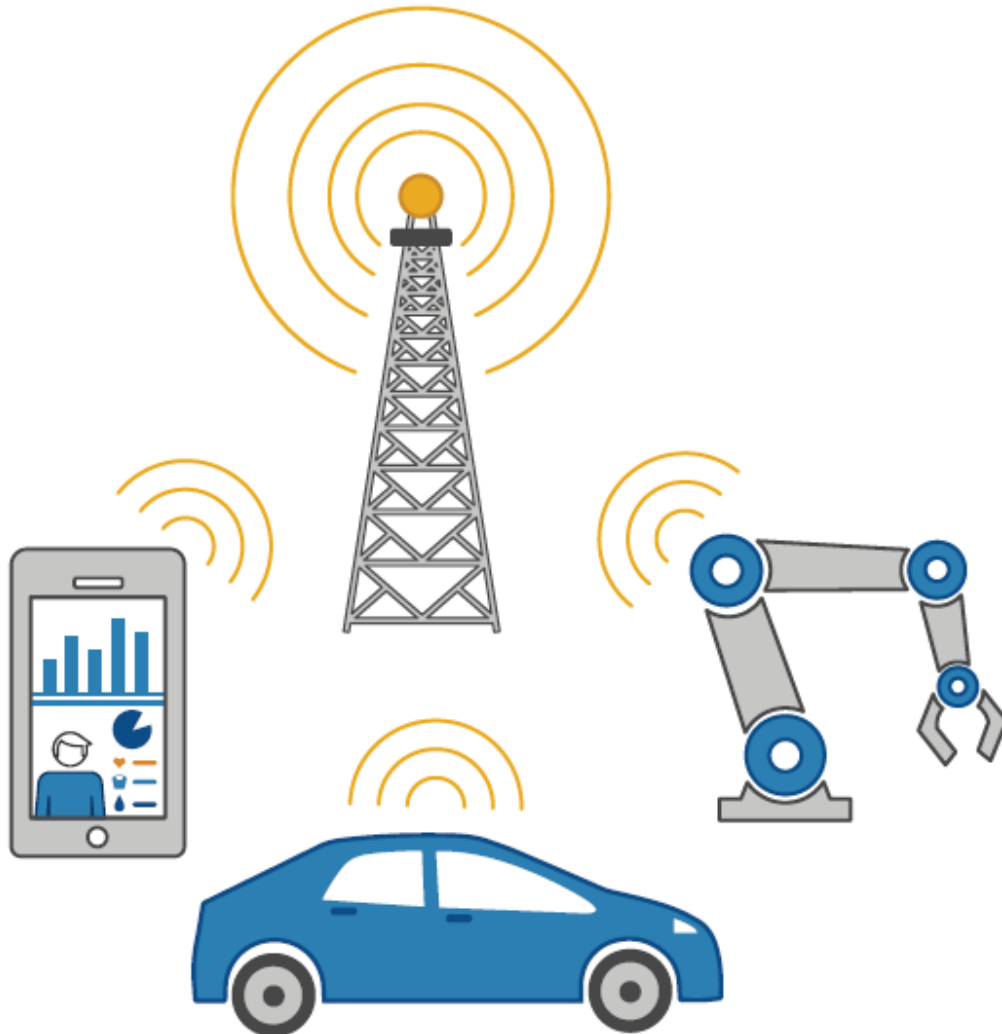

New Applications

4K, 8K, 360° Video
Virtual Reality
Connected Vehicles
Internet of Things



5G Requirements / Use Cases

Enhanced mobile broadband (>10 Gbps)
Ultra low latency (<1 ms)
Massive machine-type communication (>1e5 devices)


Achieving Higher 5G Broadband Data Rates

Technical Solutions


Increased bandwidth
 Better spectral efficiency
 Flexible air interface
 Densification




Higher Frequency Bands

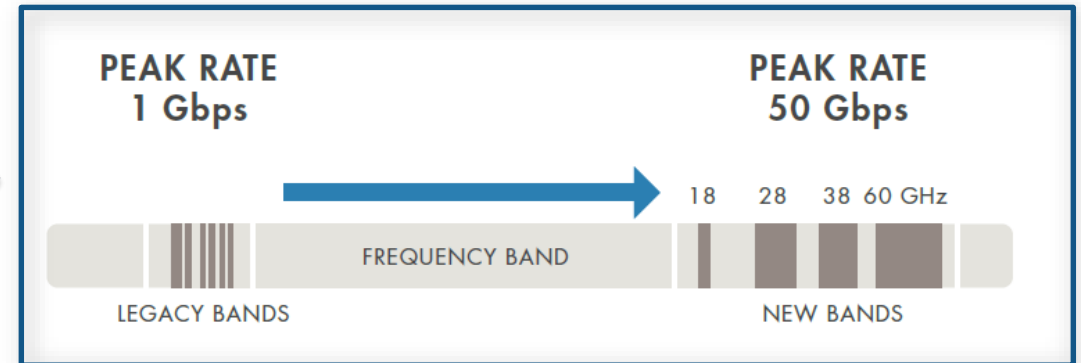

New Physical Layer

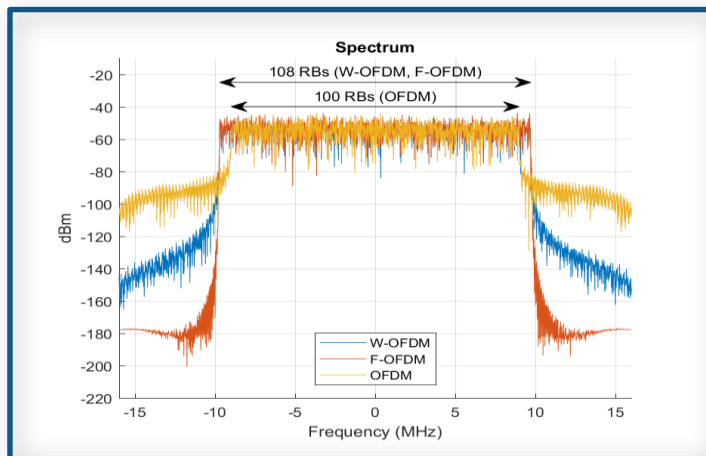

New RF Architectures

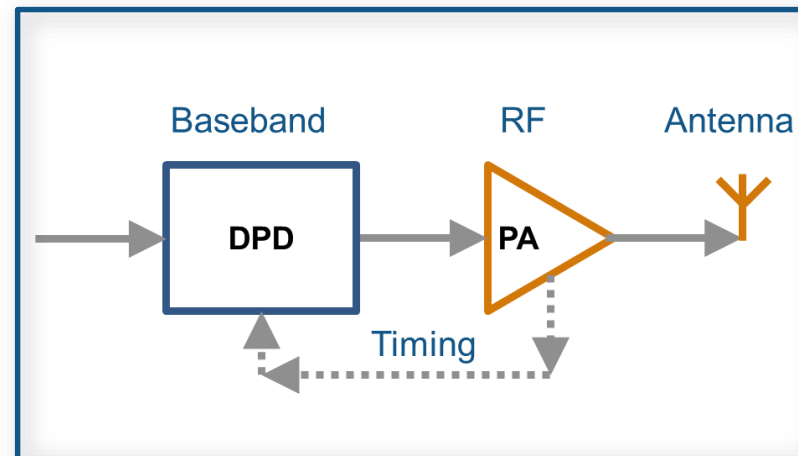


Massive MIMO



Massive MIMO antenna array for a Huawei 5G field trial.

Multi-Domain Engineering for 5G

Subsystems must be designed and tested together

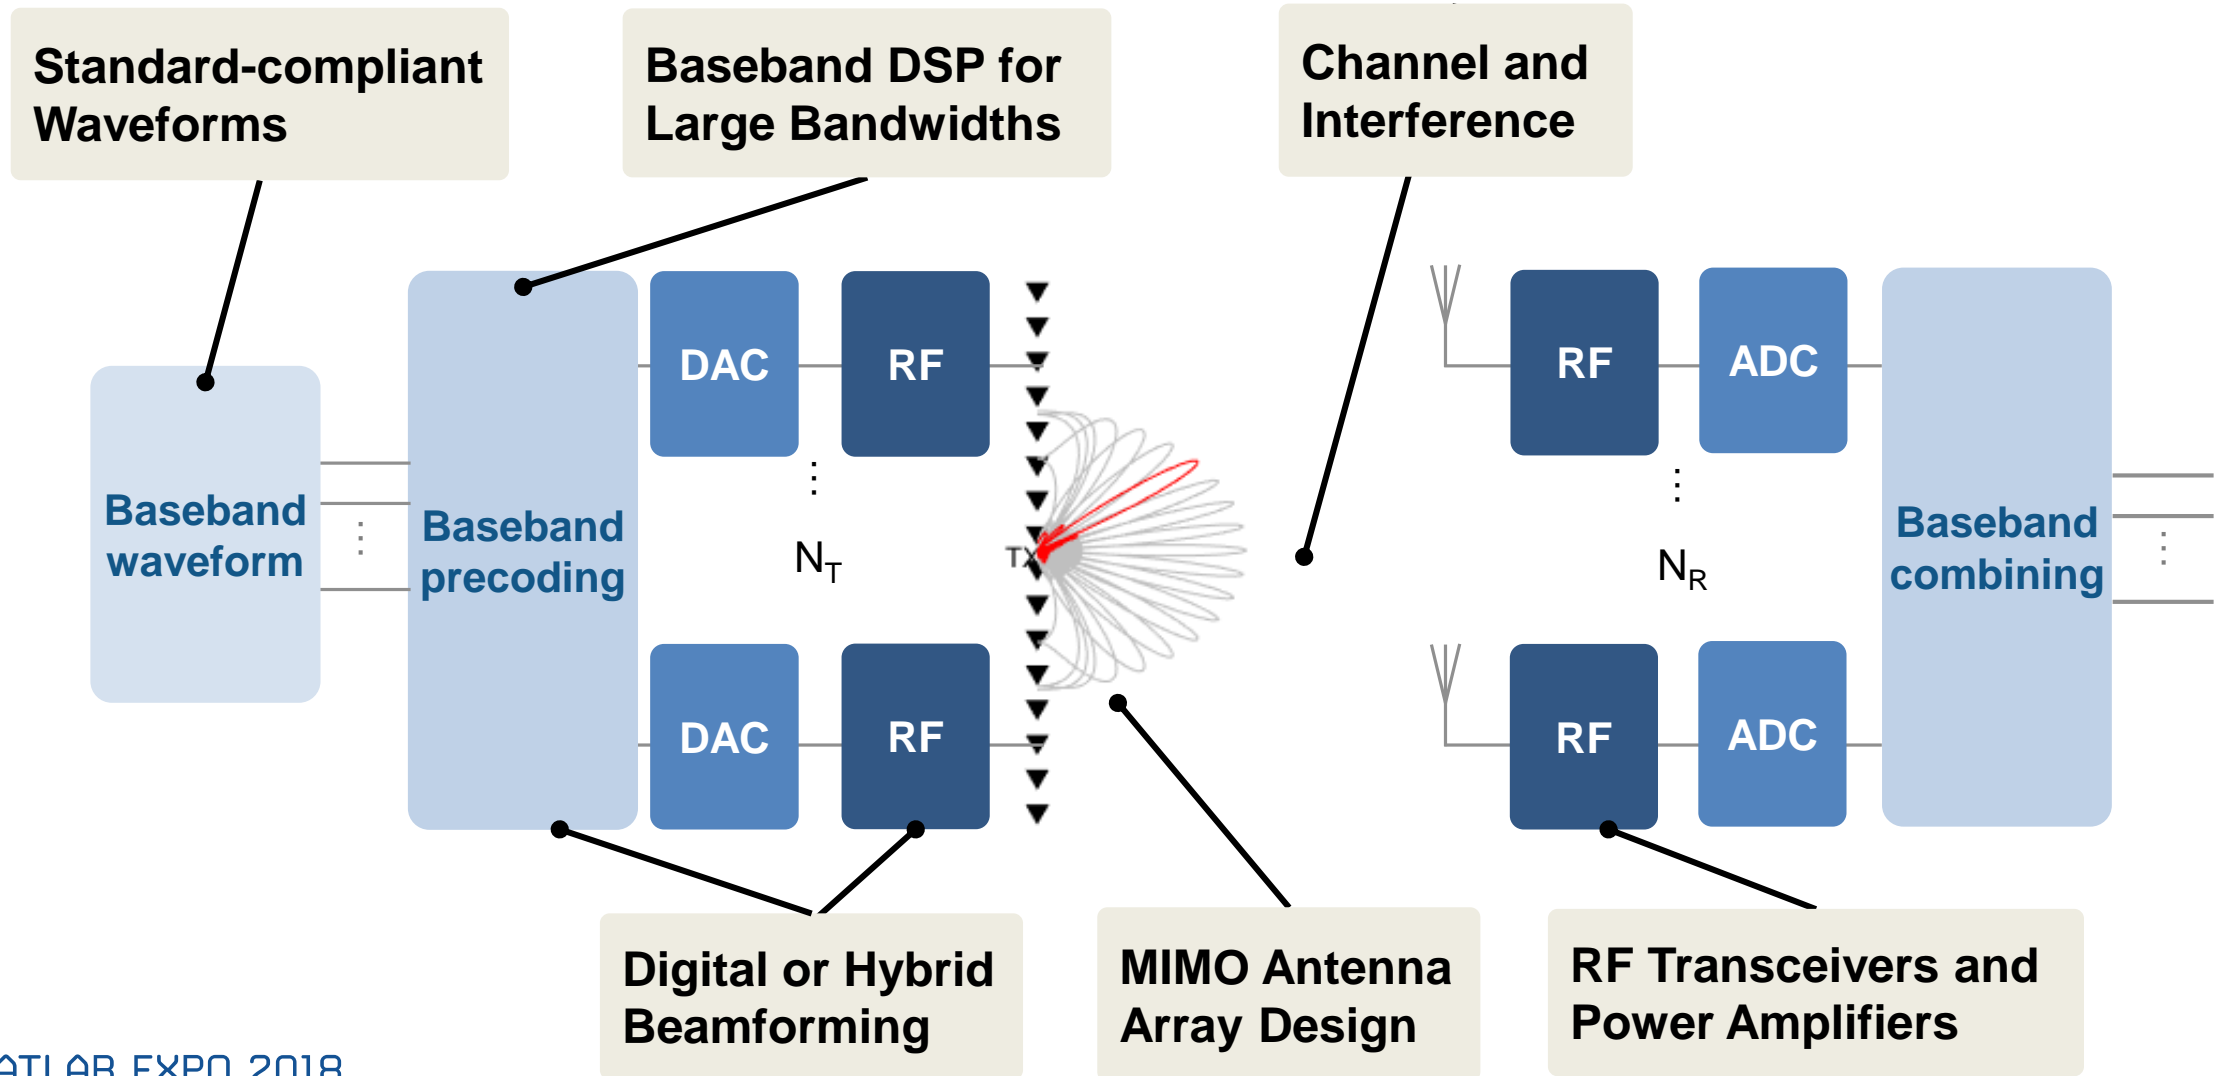


Agenda

- **5G goals and requirements**
- **Modeling and simulating key 5G technologies**
 - Release 15: Enhanced Mobile Broadband
 - IoT and V2X
- **5G development workflow**

Waveform Generation

- Test with standard-compliant waveforms
- Generate all physical channels and signals
- Off-the-shelf and full custom waveforms

5G

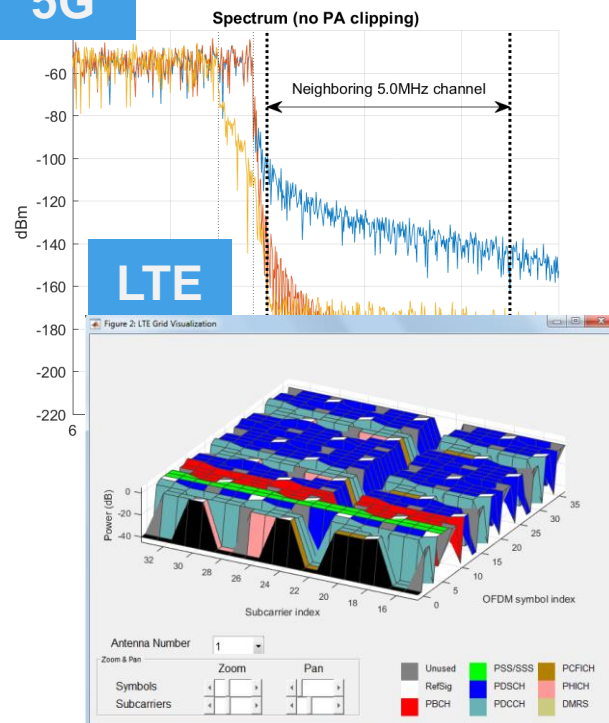


3GPP


- ✓ LTE & LTE-Advanced
- ✓ NB-IoT
- ✓ D2D Sidelink
- ✓ V2X Sidelink
- ✓ **5G New Radio**

R2018a

Standard compliance

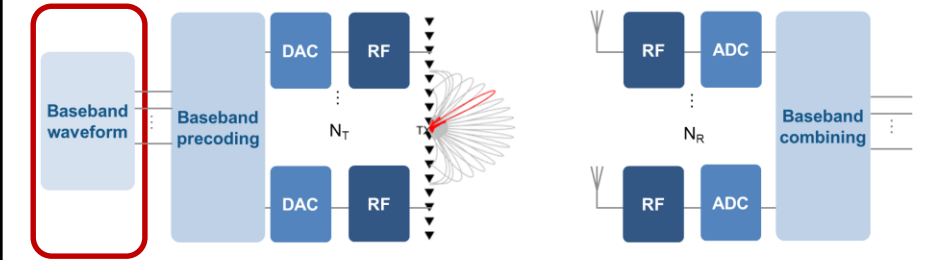

WLAN

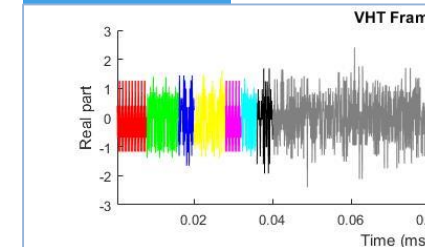

IEEE 802.11


- ✓ **802.11ax (draft)**
- ✓ 802.11ad
- ✓ 802.11ah
- ✓ 802.11ac
- ✓ 802.11a/b/g/n
- ✓ 802.11p/j

New Physical Layer in Release 15

- Enhanced Mobile Broadband (eMBB):
 - Larger bandwidth
 - Greater spectral efficiency
- PHY techniques used to achieve goals
 - Flexible frame structure and carrier spacing
 - Shorter latency
 - Variable bandwidth
 - Higher capacity coding schemes
 - Channel models: sub-6GHz to mmWave

5G Baseband Processing

- Increased bandwidth
- Greater spectral efficiency

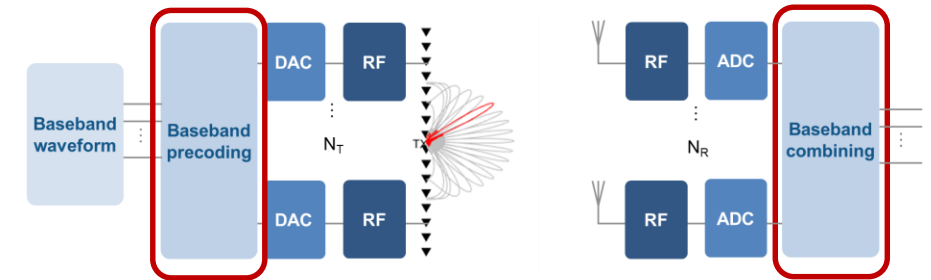


Baseband DSP for Large Bandwidths


- 5G waveform same as LTE: Cyclic-Prefix OFDM (CP-OFDM)
- New baseband techniques for higher capacity

μ	Subcarrier Spacing $\Delta f = 2^\mu * 15\text{kHz}$	Bandwidth (MHz)
0	15	49.50
1	30	99
2	60	198
3	120	396
4	240	397.44
5	480	397.44

R2018a

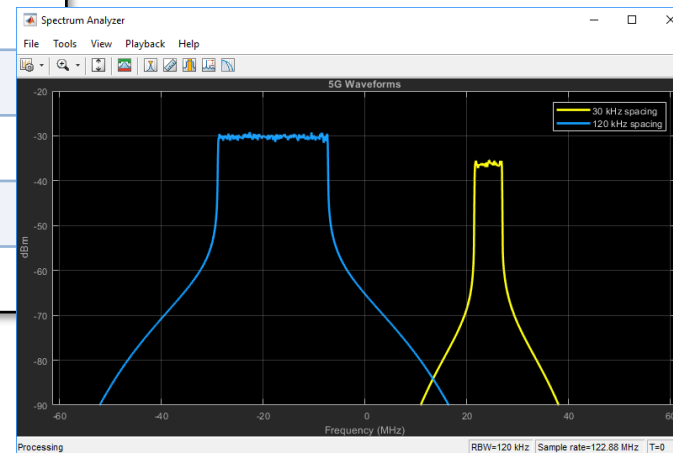


Increase bandwidth and reduce latency with flexible subcarrier spacing

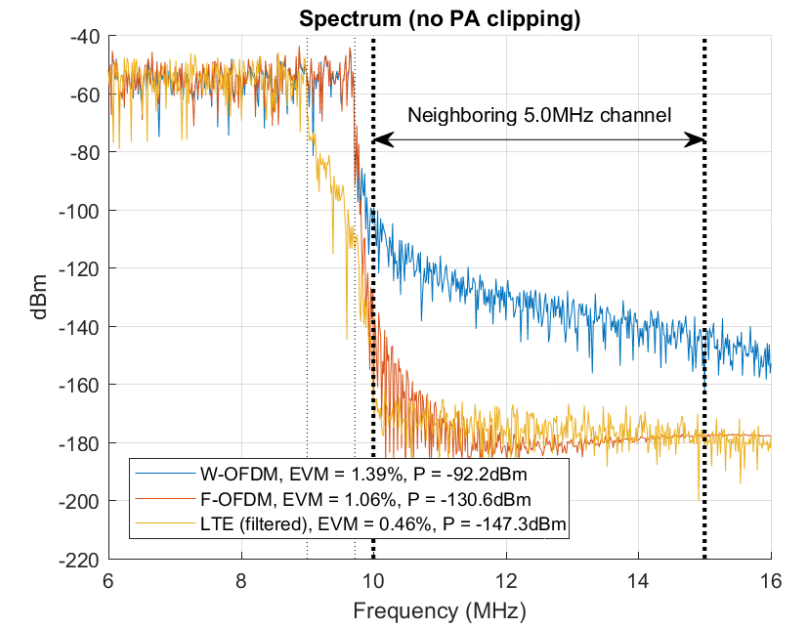

Reduce spectral leakage with filtering or windowing

Efficient Channel Coding Methods


- Low-Density Parity Check (LDPC) for data channel: memoryless block coding

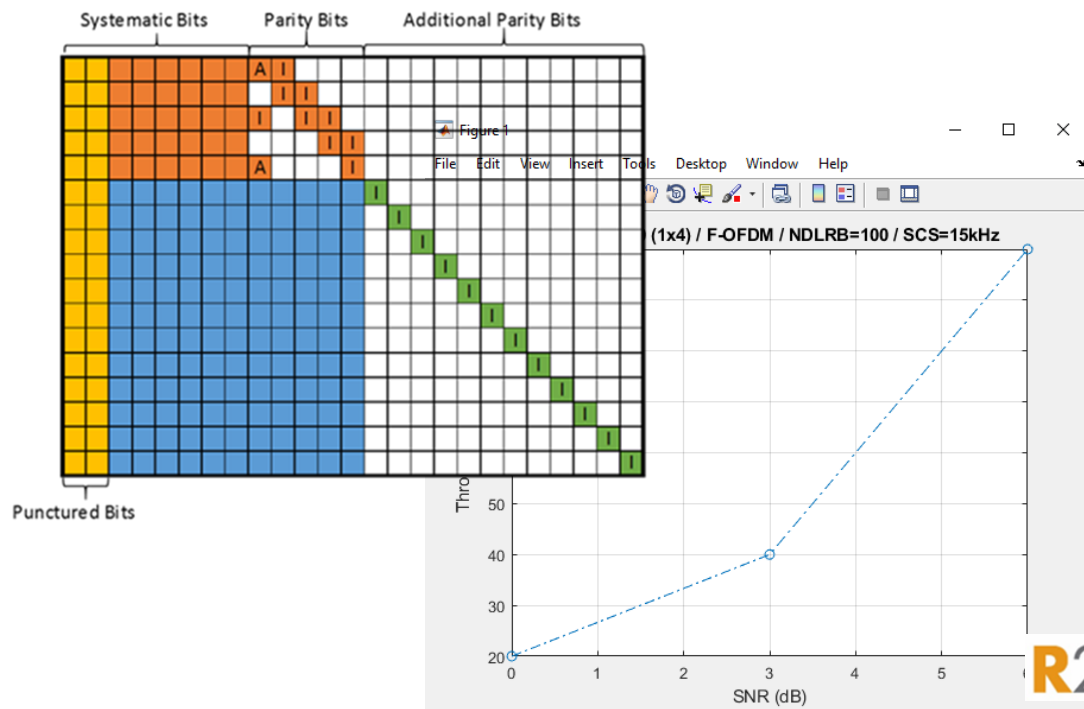

MATLAB EXPO 2018

R2018a

- Polar Codes for control channel: achieve channel capacity

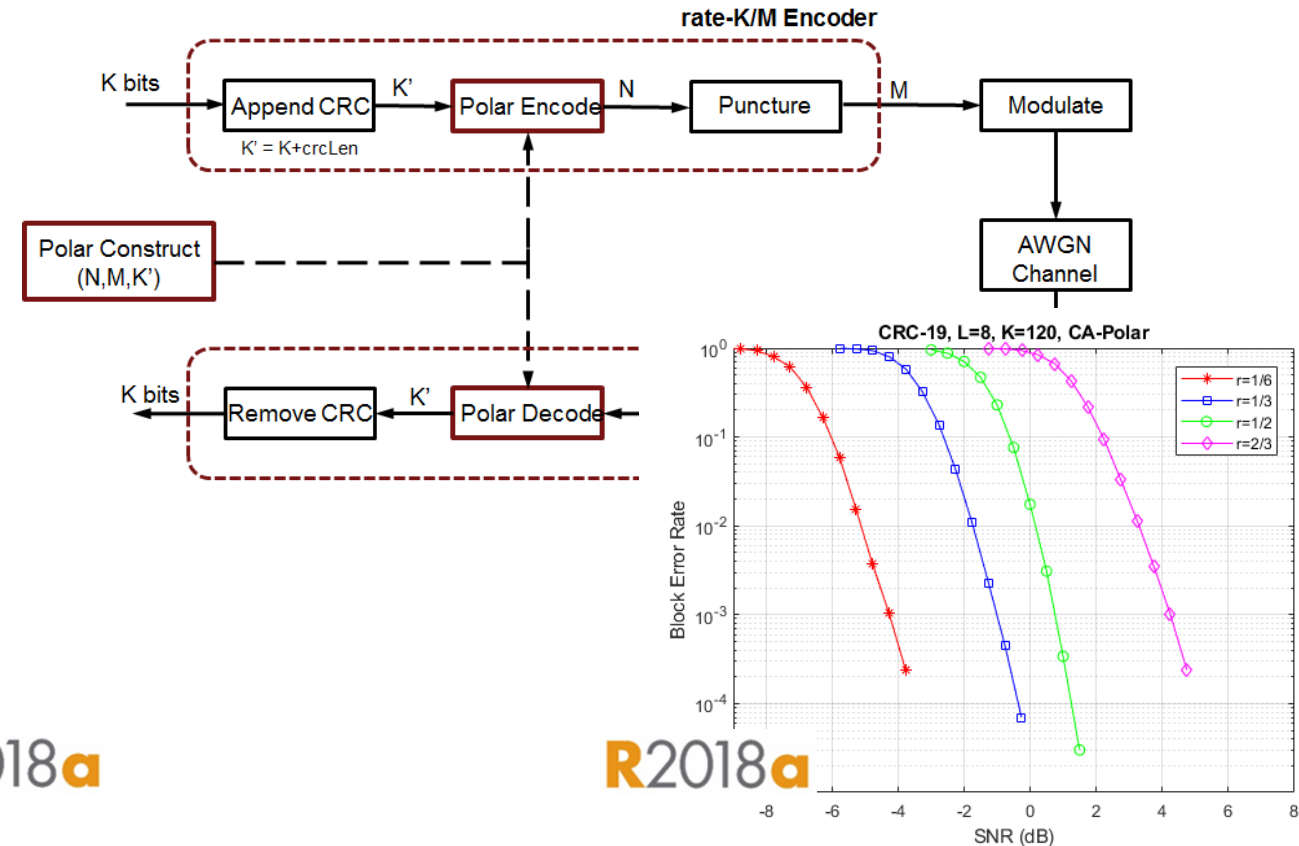

R2018a

Model Channel and Interference



- Interference
 - Multiple standards: 5G/LTE/WLAN

- 3D propagation channels
 - 5G, LTE, 802.11, Custom


- Visualize propagation on maps
 - Rx/Tx location
 - Signal strength and coverage
 - Signal-to-interference-plus-noise (SINR)

Channel and Interference

- Multiple UEs/Base Stations
- Signal propagation

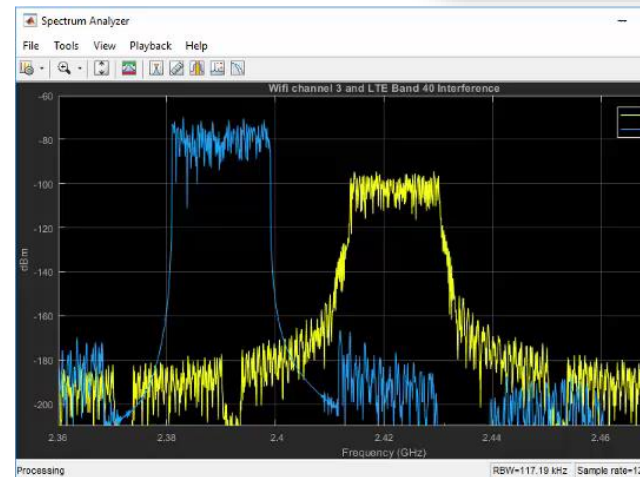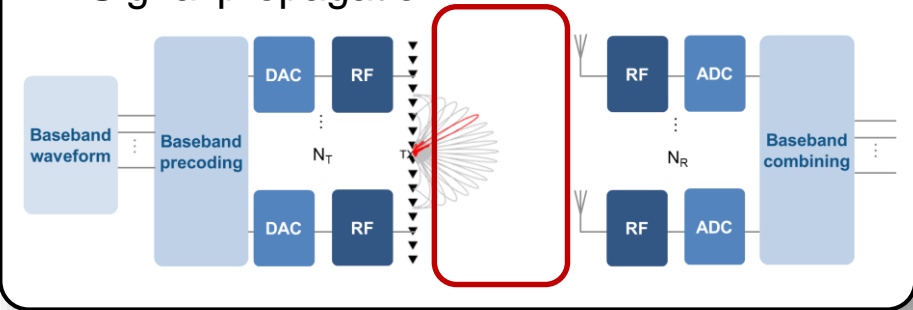

LTE-WLAN interference

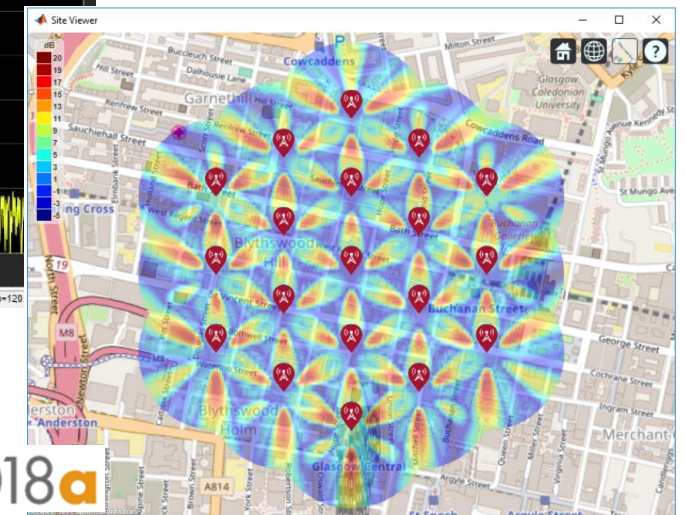


R2018a


SINR for 5G urban macro-cell

5G Channel Model

- 3GPP TR 38.901: 500 MHz - 100 GHz (mmWave)
- For massive MIMO arrays (>1024 elements)
- Delay profiles:
 - Control delay line (CDL): Full 3D model
 - Tapped delay line (TDL): Simplified for faster simulation
- Control key parameters
 - Channel delay spread
 - Doppler shift
 - MIMO correlation



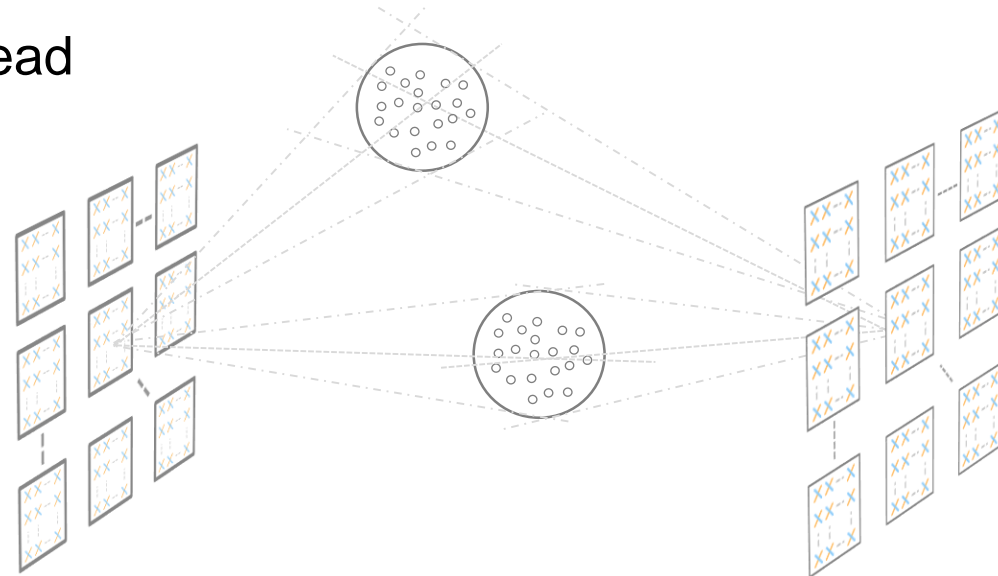


Cluster Delay Line: 3D model

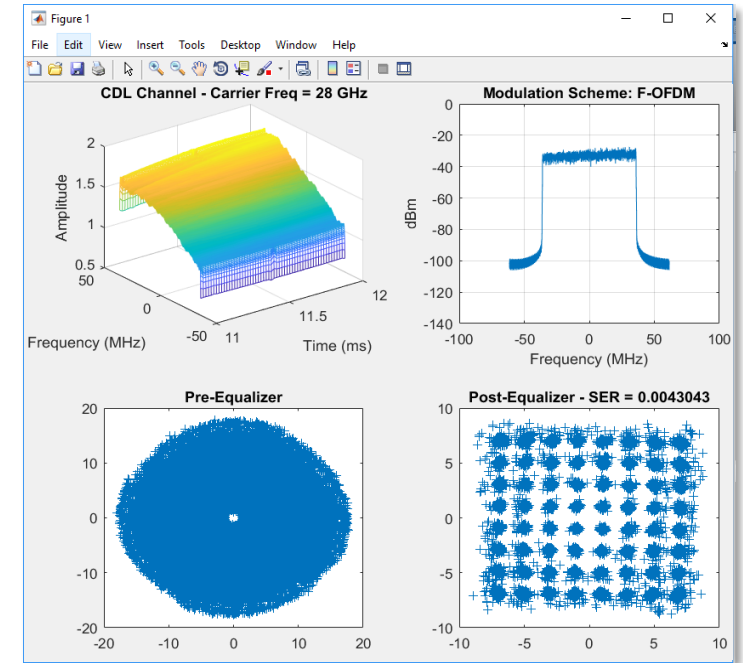

5G Link Level Simulation

- End-to-end physical layer reference model
- Verify implementation
- Evaluate impact of algorithm designs on link performance

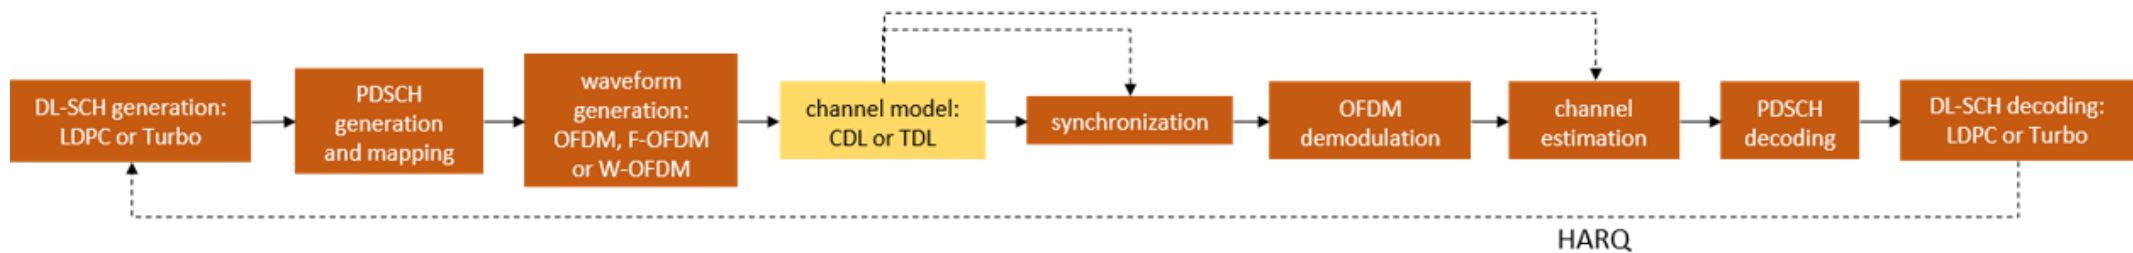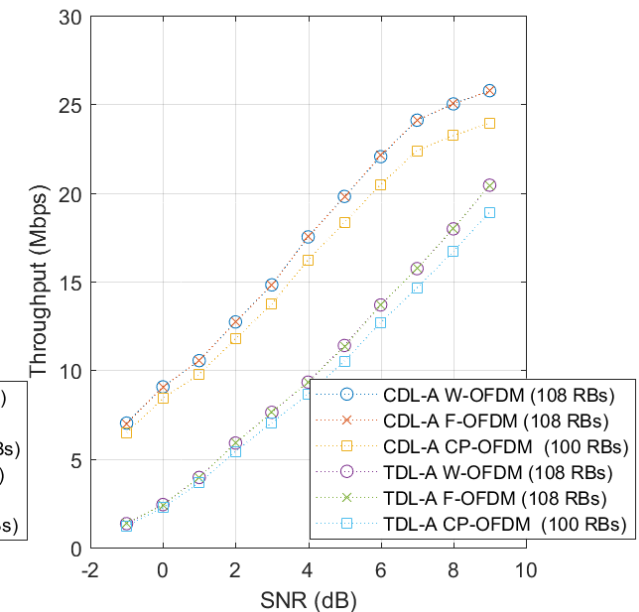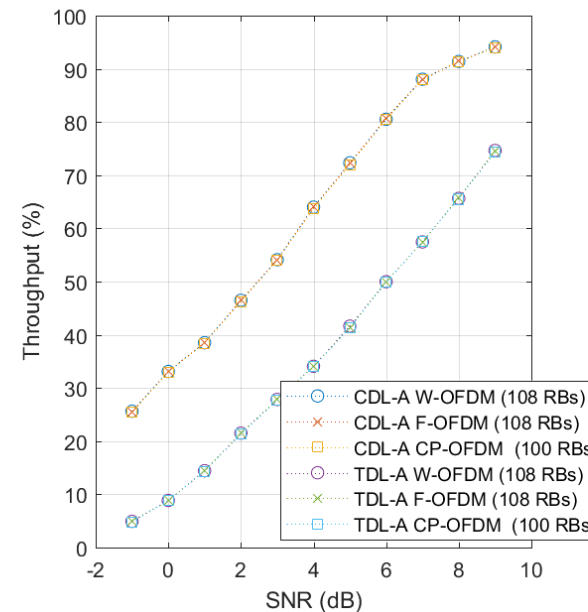




RF Power Amplifier (PA) Linearization

- 5G frequencies and bandwidth put greater requirements on RF transmitter efficiency

- 5G PA's are difficult to model
 - Non-linearity
 - Memory effects
- Solution: Linearization using adaptive digital pre-distortion (DPD)


RF challenges in 5G

- Frequency dependent behavior
- Highly integrated RF + digital devices

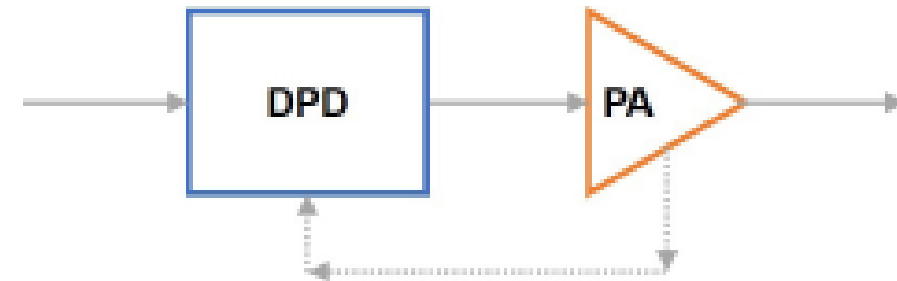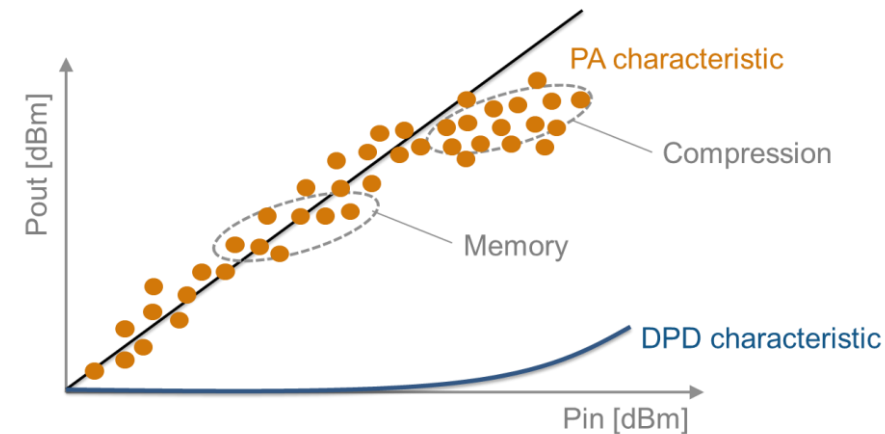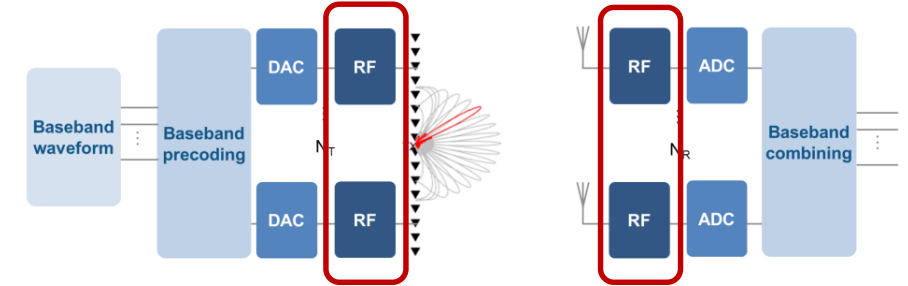

Characterize PA Model Using Measured Data

PA Data

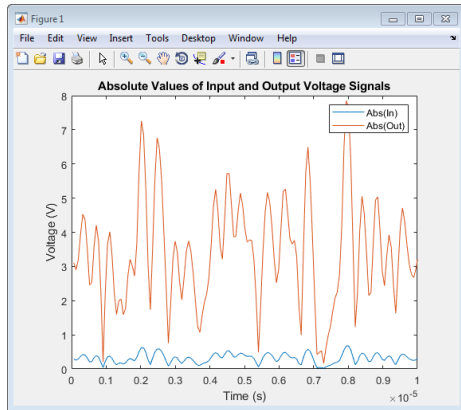

MATLAB fitting procedure
(White box)

```
function a_coef = fit_memory_poly_model(x,y,memLen,degLen,modType)
% FIT_MEMORY_POLY_MODEL
% Procedure to compute a coefficient matrix given input and output
% signals, memory length, nonlinearity degree, and model type.
%
% Copyright 2017 Mathworks, Inc.



x = x(:);
y = y(:);
xLen = length(x);

switch modType
case 'memPoly' % Memory polynomial
    xrow = reshape((memLen:-1:1) + (0:xLen:xLen*(degLen-1)),1,[]);
    xVec = (0:xLen-memLen)' + xrow;
    xPow = x.*(abs(x).^(0:degLen-1));
    xVec = xPow(xVec);
case 'ctMemPoly' % Cross-term memory polynomial
    absPow = (abs(x).^(1:degLen-1));
    partTop1 = reshape((memLen:-1:1)'+(0:xLen:xLen*(degLen-2)),1,[]);
    topPlane = reshape(
        [ones(xLen-memLen+1,1),absPow((0:xLen-memLen)' + partTop1)].', ...
        1,memLen*(degLen-1)+1,xLen-memLen+1);
    sidePlane = reshape(x((0:xLen-memLen)' + (memLen:-1:1)).', ...
        memLen,1,xLen-memLen+1);
    cube = sidePlane.*topPlane;
    xVec = reshape(cube,memLen*(memLen*(degLen-1)+1),xLen-memLen+1).';
end

coef = xVec\y(memLen:xLen);
a_coef = reshape(coef,memLen,numel(coef)/memLen);
```

R2018a



MATLAB PA model

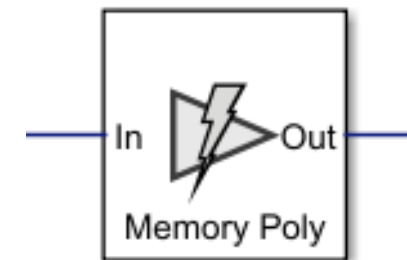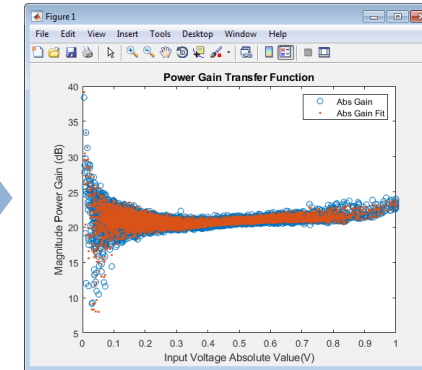

PA model for circuit
envelope simulation

PA + DPD Simulation

- Closed loop multi-domain simulation
 - Circuit Envelope for fast RF simulation
 - Low-power RF and analog components
 - DPD signal processing algorithm (behavioral or hardware-accurate)

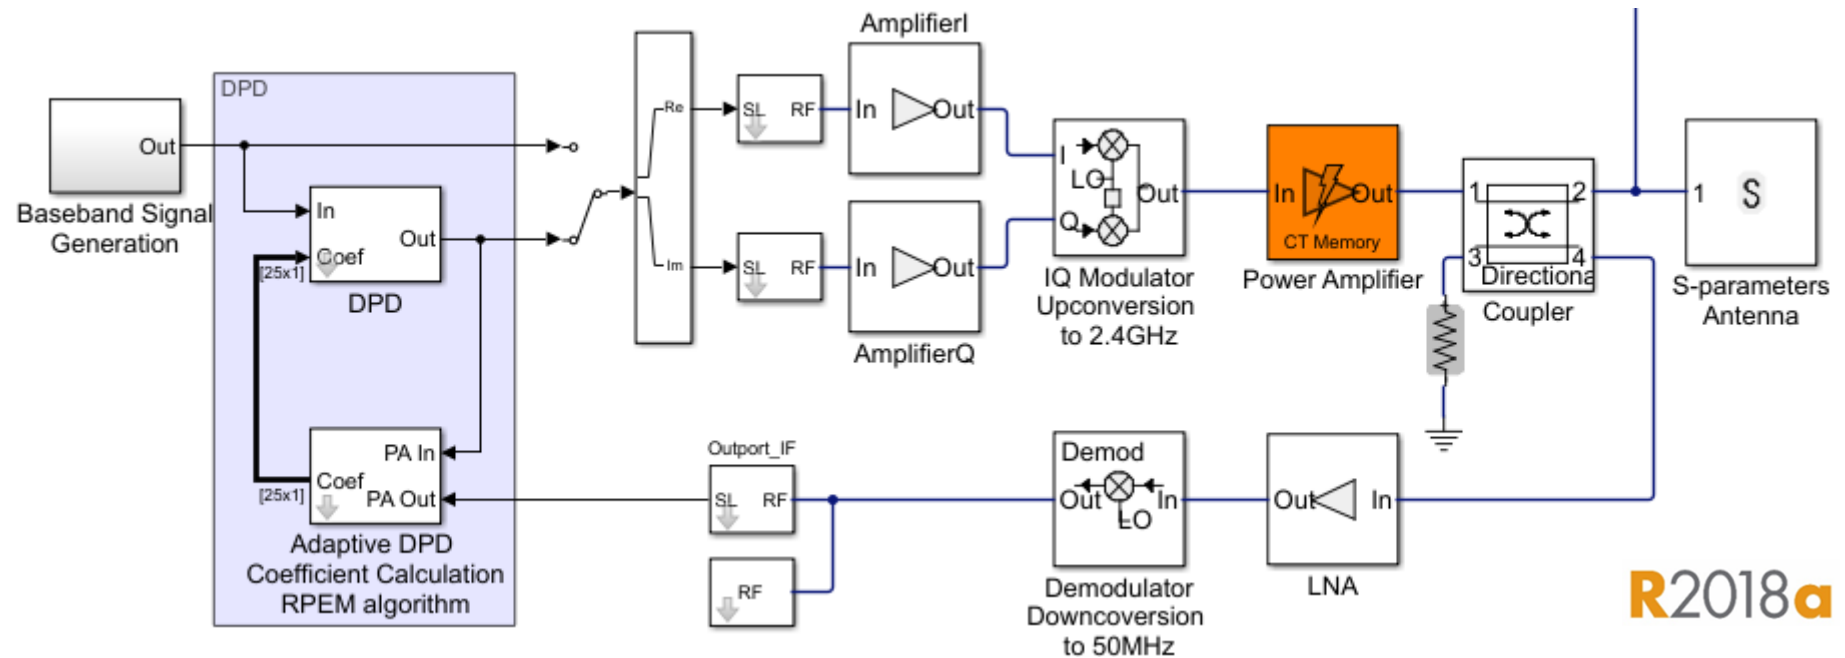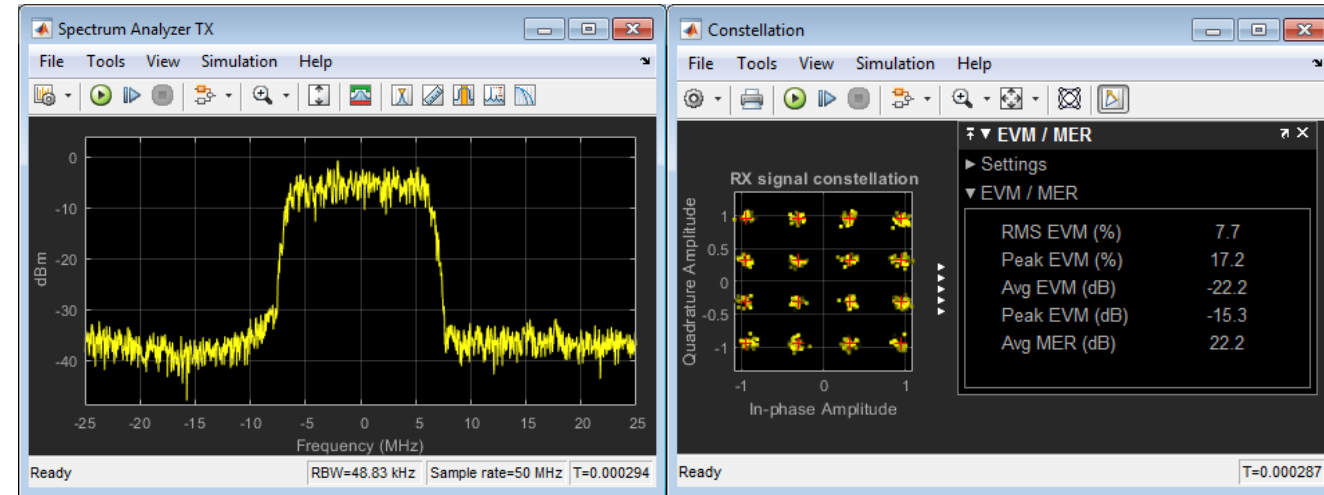






R2018a

Massive MIMO Antenna Arrays

- Model antenna and array beam patterns
- Model antenna element failures
- Optimize tradeoffs between antenna gain and channel capacity
- Simulate with 3D channel model

Antenna array design considerations

- Element coupling
- Imperfections

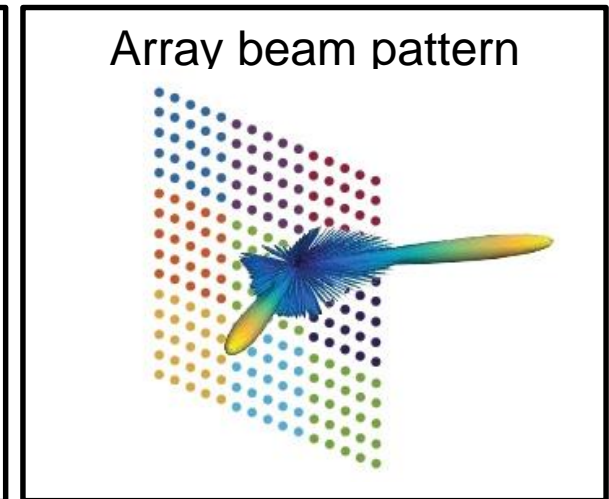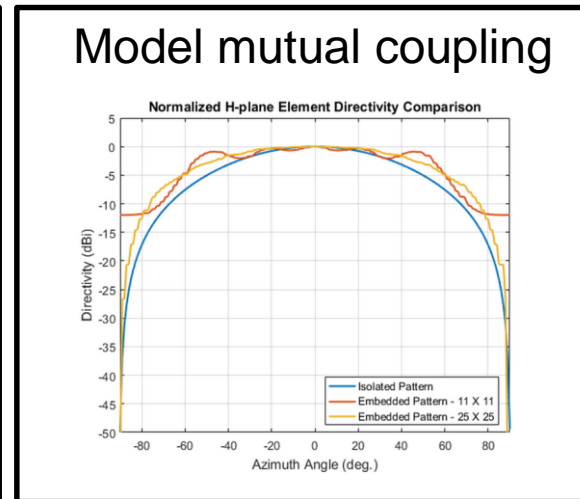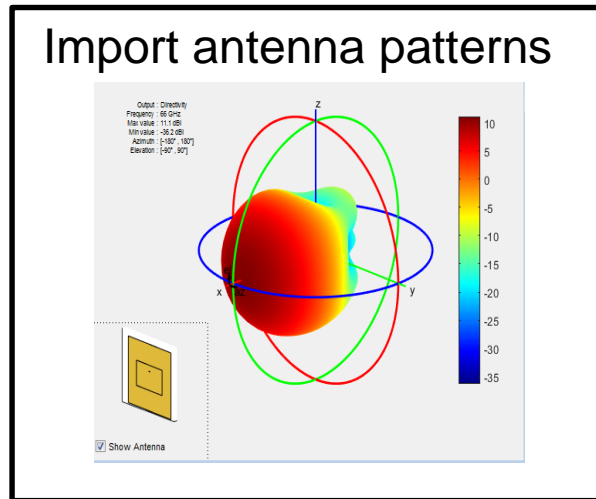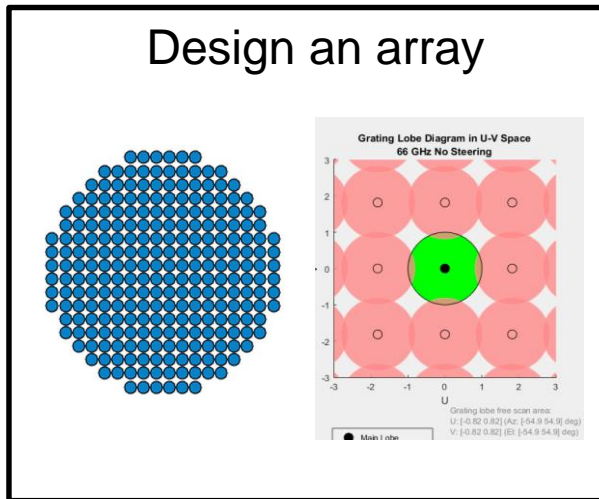
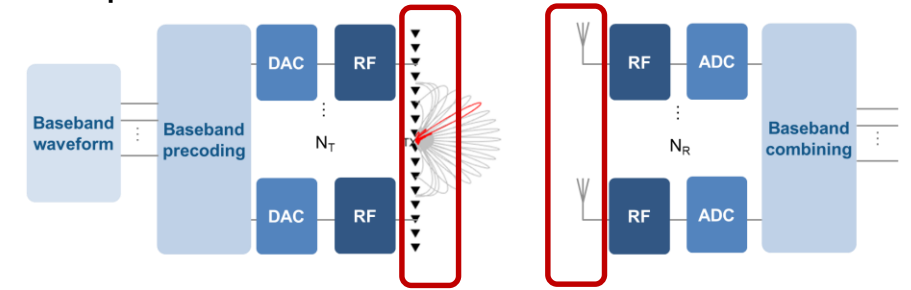


Hybrid Beamforming for Massive MIMO

- Beamforming partitioned between digital and RF
 - Each Tx and Rx element has phase control
 - Subarrays handle amplitude and additional phase
 - Number of transmit antennas can be $\gg N_S$ (N_{RF})
- Model and optimize beamforming architecture
- Model imperfections in the signal chain

Why Hybrid Beamforming?

- Massive MIMO reduces mmWave propagation loss
- Hybrid beamforming reduces implementation cost

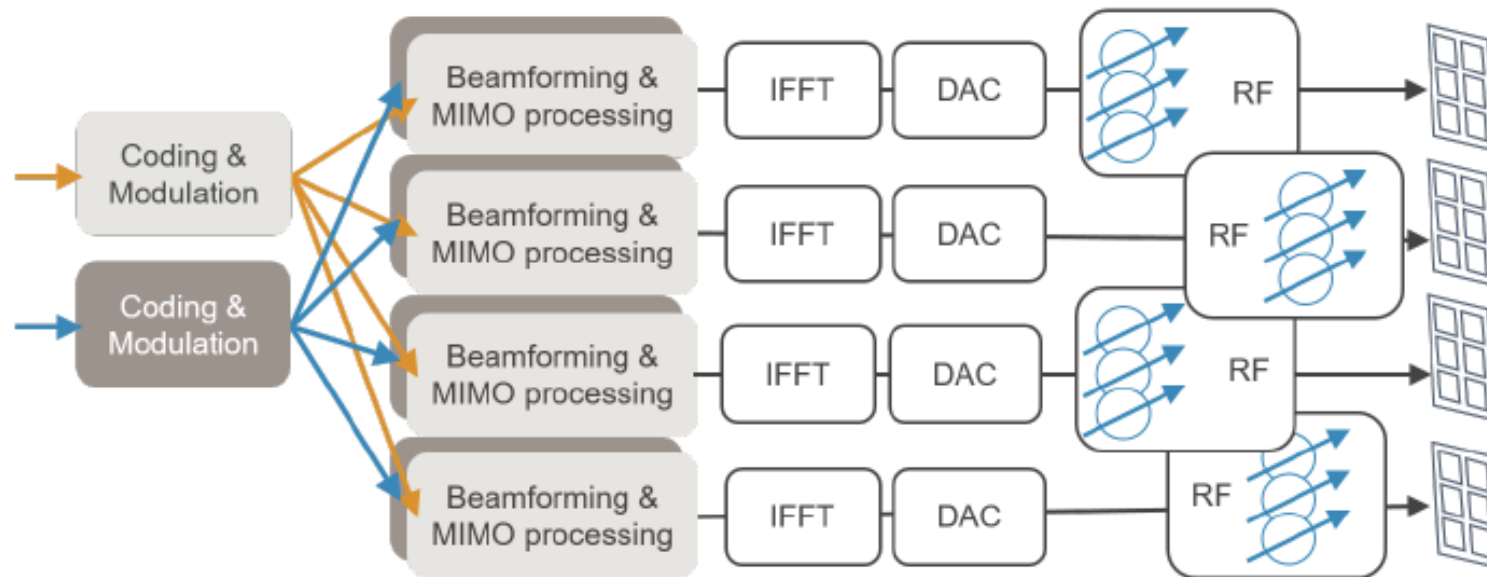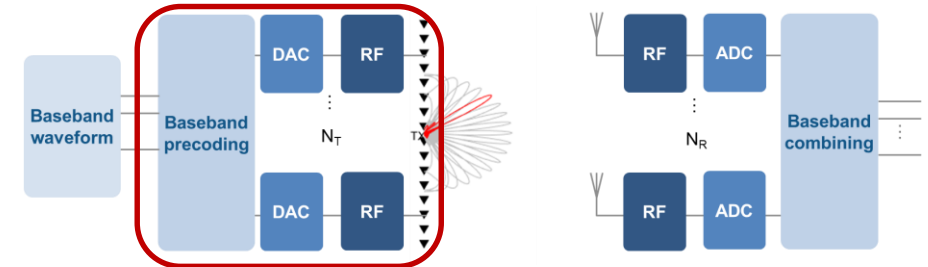

Agenda


- **5G goals and requirements**
- **Modeling and simulating key 5G technologies**
 - Release 15: Enhanced Mobile Broadband
 - Connecting Vehicles and IoT Devices
- **5G development workflow**




V2X: Building the Connected Car Highway

Standards for V2X

- 5G: Reserved for future release
- Cellular V2X (C-V2X)
 - Release 14 LTE Sidelink
 - **LTE System Toolbox**
- DSRC
 - IEEE 802.11p
 - **WLAN System Toolbox**

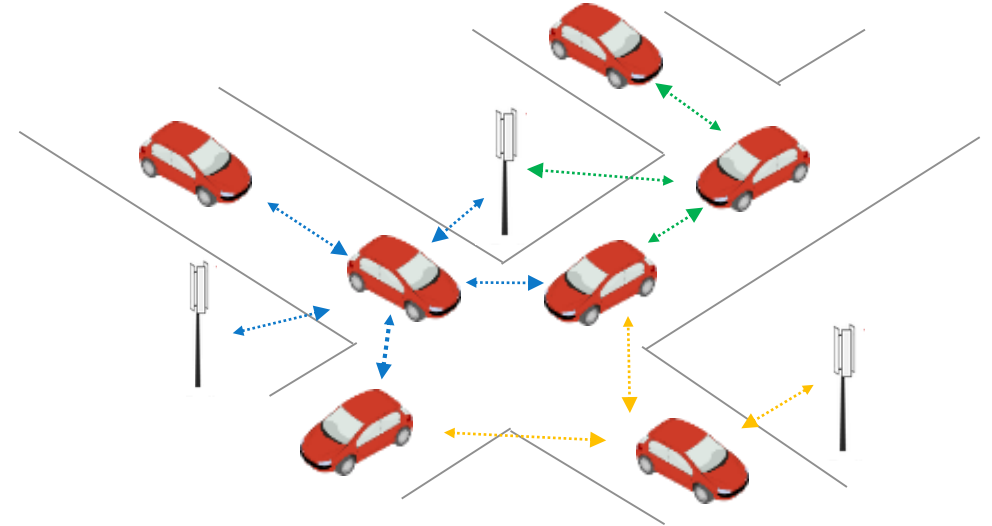


PHY Waveform Generation

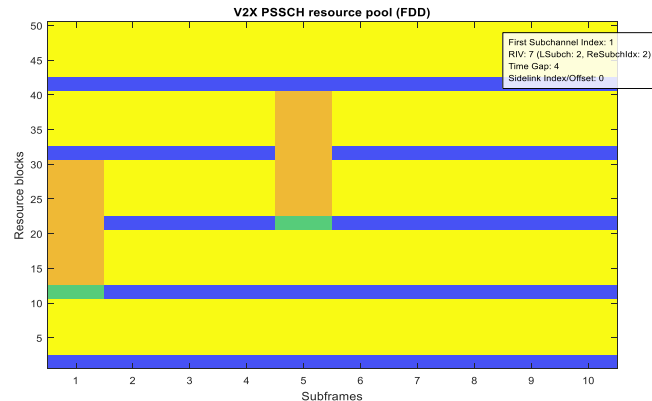

R2017b

Throughput Simulation

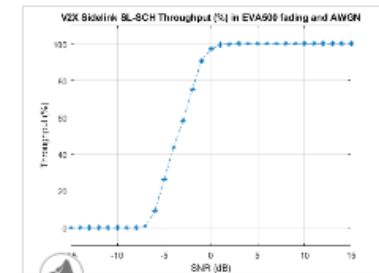


Release 14 V2X Sidelink PSSCH and PSSCH Throughput



Demonstrates how to measure the Physical Sidelink Shared Channel (PSSCH) and Physical Sidelink Control Channel (PSCCH) Throughput

Future 5G Use Case: IoT Connectivity

- IoT use case reserved for future 5G release
- Cellular long-range standard: LTE NB-IoT
 - Compatible with LTE networks
 - Lower cost and power, extended range
- NB-IoT cost and power reduction techniques
 - Reduced peak rate and bandwidth (1.4MHz)
 - Reduced maximum transmit power
 - Single antenna
 - No higher-order modulation (BPSK and QPSK)

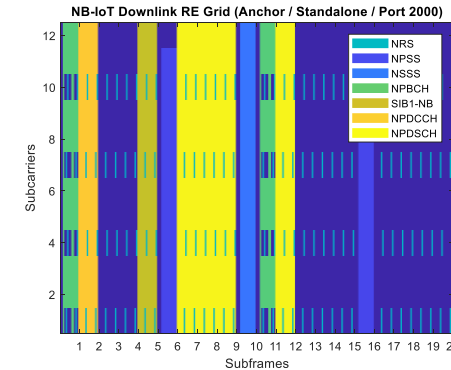

Waveform Generation

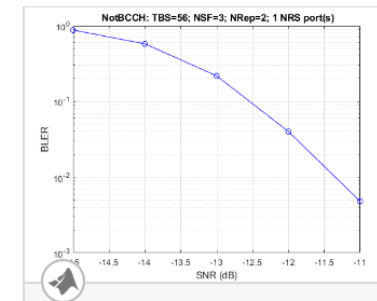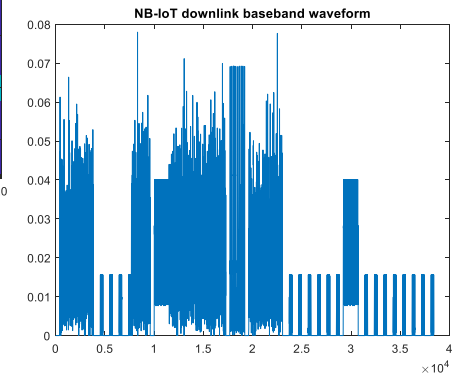

NB-IoT NPDSCH Block Error Rate Simulation

How LTE System Toolbox™ can be used to create a NB-IoT Narrowband Physical Downlink Shared Channel (NPDSCH) Block


R2018a BLER Simulation

Agenda

- 5G goals and requirements
- Modeling and simulating key 5G technologies
 - Release 15: Enhanced Mobile Broadband
 - Connecting Vehicles and IoT Devices
- » ▪ 5G development workflow



From idea ...

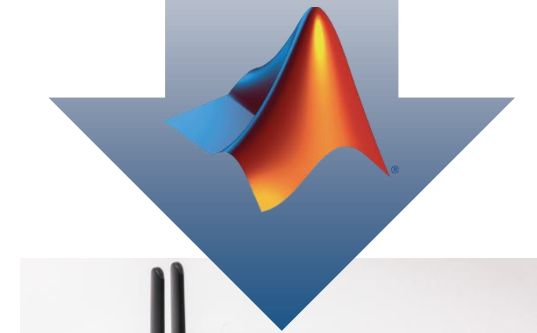

... to implementation

Customer Perspective

“We need a multidomain platform for simulation, rapid prototyping, and iterative verification from the behavior model to testbed prototyping to the industrial product. MATLAB and Simulink are helping us to achieve these goals.”

- Kevin Law, director of algorithm architecture and design, Huawei

Can you tell us more about how MATLAB and Simulink are helping you?

These two platforms play an important role in our innovation areas like 5G, optical communication, and wireless terminals. The tools give us top-down Model-Based Design, a product ecosystem that covers multiple domains, and code generation and iterative verification.

https://www.mathworks.com/content/dam/mathworks/tag-team/Objects/h/80861v00_Huawei_QA.pdf

MATLAB & Simulink Wireless Design Environment

for baseband, RF, and antenna modeling and simulation

Algorithms, Waveforms, Measurements




- Communications System Toolbox
- LTE System Toolbox (5G Library)
- WLAN System Toolbox

RF Front End

- RF Toolbox
- RF Blockset

Antennas, Beamforming

- Antenna Toolbox
- Phased Array System Toolbox

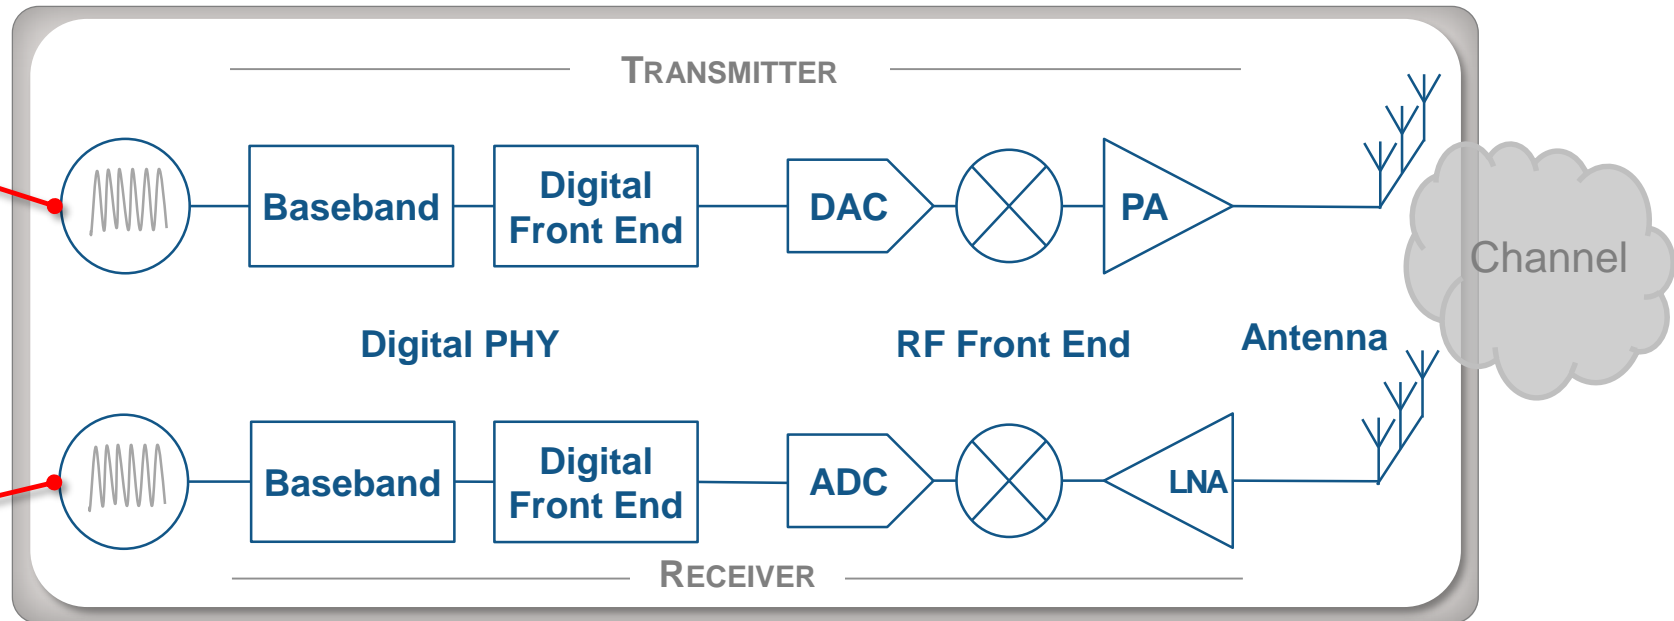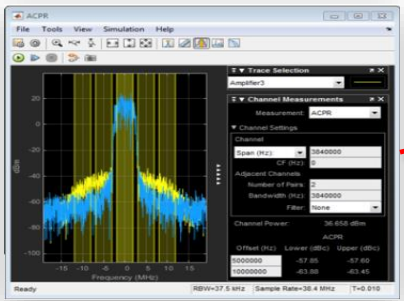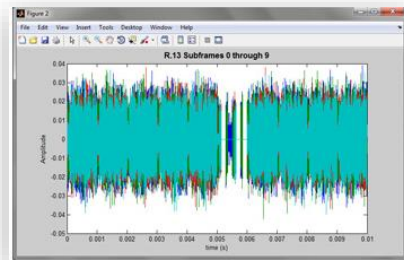


- Simulink
- DSP System Toolbox
- Control System Toolbox

Mixed-signal

- Communications System Toolbox
- Antenna Toolbox
- LTE System Toolbox
- WLAN System Toolbox

Channel and Propagation


Over-the-Air Testing with SDR and RF Instruments

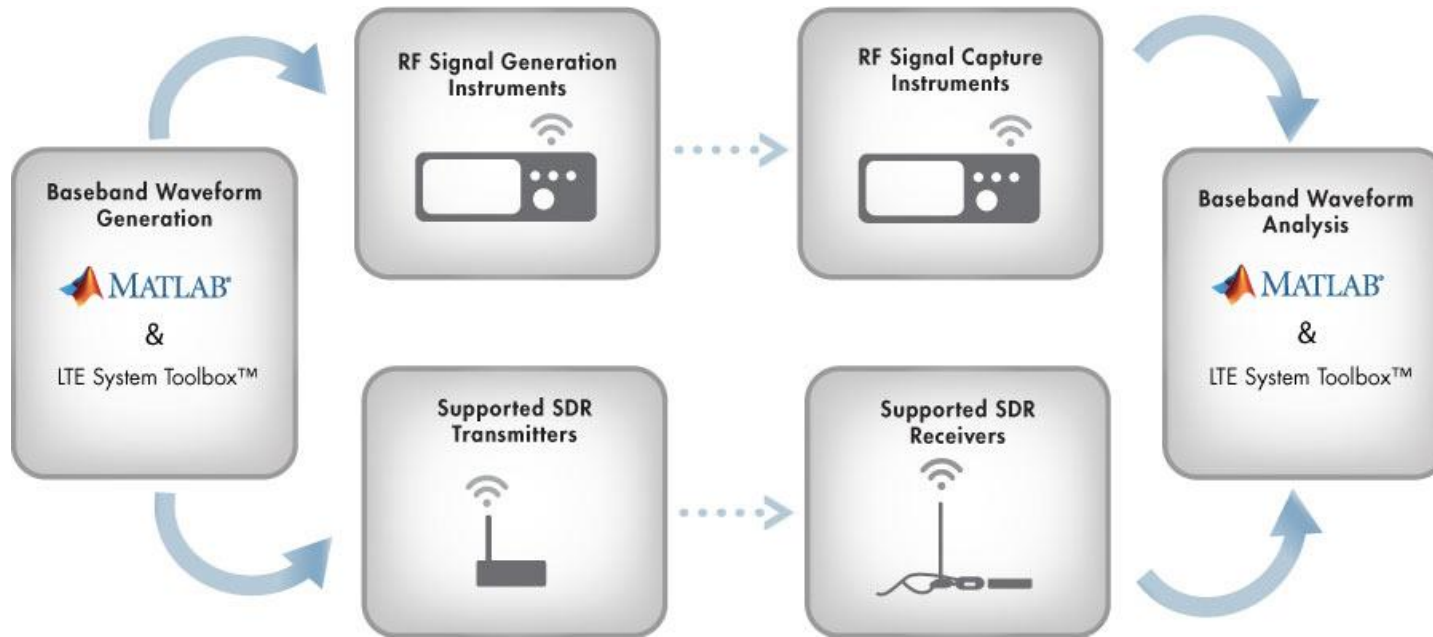

Over-the-air Testing
 Instrument Control Toolbox
 SDR Support Packages
 Communications System Toolbox





Accelerate Simulations with Scalable Computing

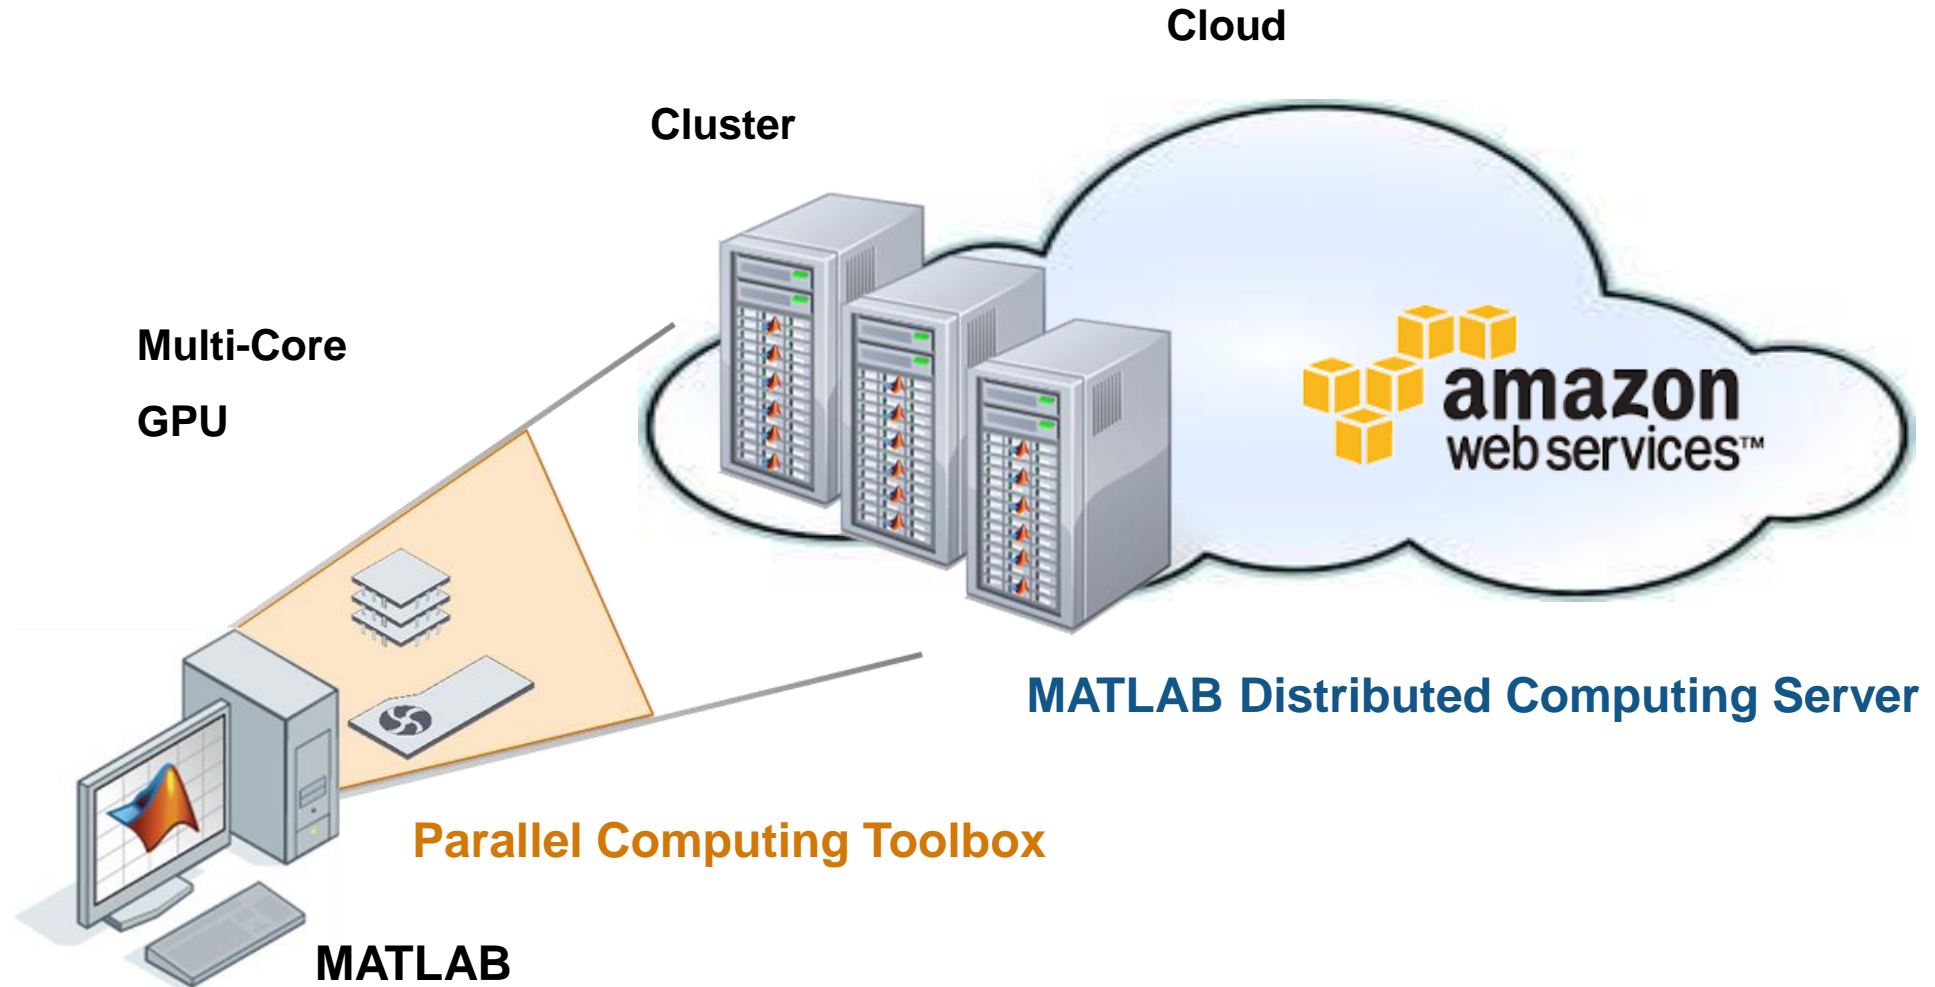

Common Platform for Wireless Development

MATLAB® & SIMULINK®

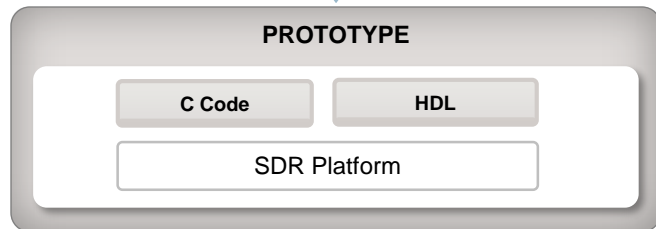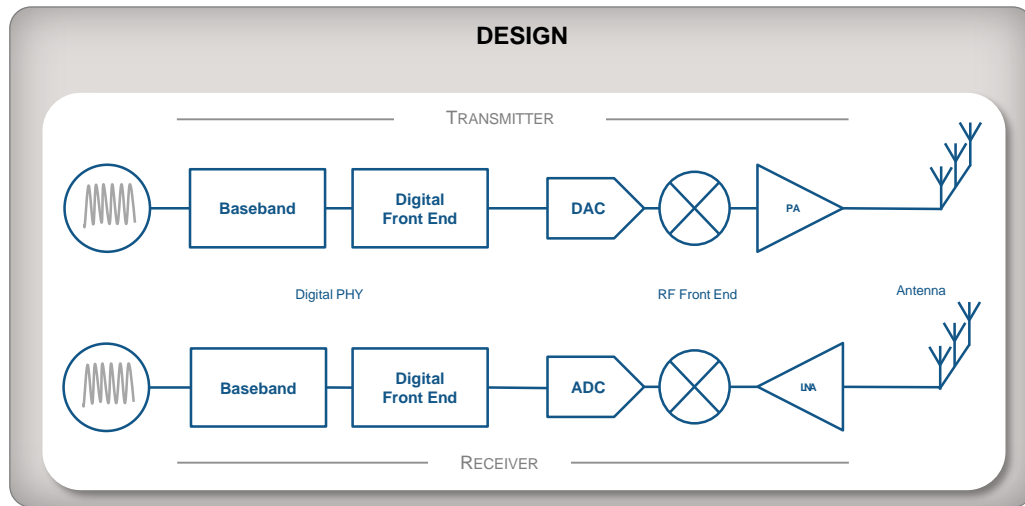

- Algorithm Design and Verification
- RF, Digital and Antenna Co-Design
- System Verification and Testing
- Rapid Prototyping and Production

Code Generation and Verification

Fixed-Point Designer

HDL Coder

HDL Verifier


LTE HDL Toolbox **R2017b**

Embedded Coder

Agenda

- **5G goals and requirements**
- **Modeling and simulating key 5G technologies**
 - Release 15: Enhanced Mobile Broadband
 - Connecting Vehicles and IoT Devices
- **5G development workflow**
- » ▪ **Learn more...**


Resources to Help You Get Started

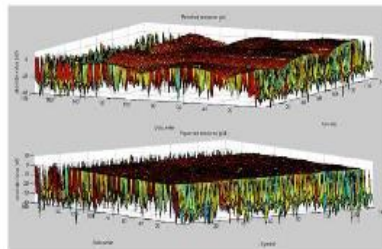

Conformance Testing

Ensure your designs comply with the supported 3GPP LTE standard releases.

» [Learn more](#)

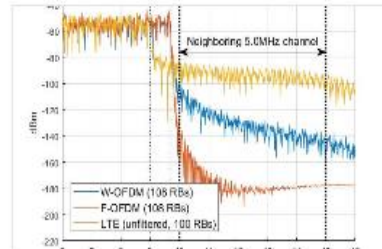


5G Library

Simulate 3GPP 5G new radio technologies.

» [Learn more](#)


R2018a

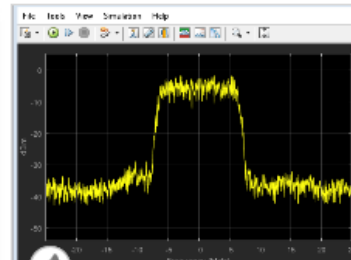

Power Amplifier Characterization with DPD for Reduced Signal


Provides a methodology for characterizing a nonlinear RF Blockset™ power amplifier (PA) with memory and an adaptive DPD

R2018a

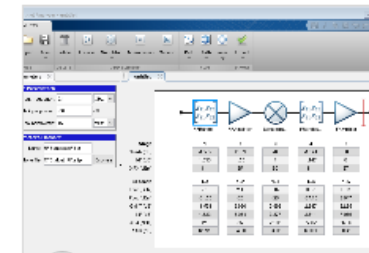

Visualizing RF Budget Analysis Over Bandwidth


Programmatically perform an RF budget analysis of an RF receiver system and visualize computed budget results across the bandwidth

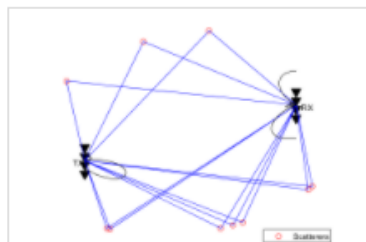

Improve SNR and Capacity of Wireless Communication Using...

The goal of a wireless communication system is to serve as many users with the highest possible data rate given constraints


[Open Script](#)

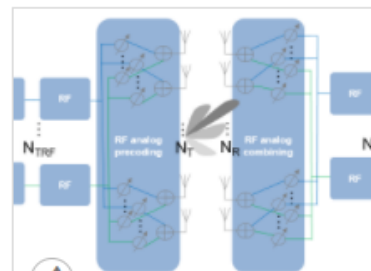

Introduction to Hybrid Beamforming

Introduces the basic concept of hybrid beamforming and shows how to simulate such a system.

[Open Script](#)

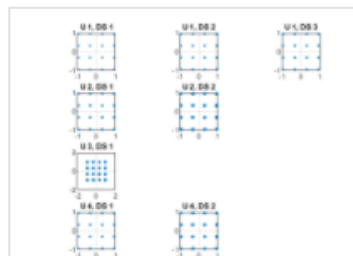

Massive MIMO Hybrid Beamforming

How hybrid beamforming is employed at the transmit end of a massive MIMO communications system, using techniques for both

R2018a



SINR Map for a 5G Urban Macro-Cell Test Environment

This example shows how to construct a 5G urban macro-cell test environment and visualize the signal-to-interference-plus-noise

R2018a

Resources – Links in PDF Document

View web resources

[Wireless Communications Design with MATLAB](#)

[MATLAB and Simulink for 5G Technology Development](#)

Read eBook and white papers

[5G Development with MATLAB](#) (eBook)

[Hybrid Beamforming for Massive MIMO Phased Array Systems](#) (white paper)

[Four Steps to Building Smarter RF Systems with MATLAB](#) (white paper)

[Evaluating 5G Waveforms Over 3D Propagation Channels with the 5G Library](#) (white paper)

Download software

[Wireless communications trial package](#)

[Download the 5G Library](#)